

# ***MUSTANG 300 DS***

## ***Dual-Speed Floor Machine***



For a versatile, economical dual-speed floor machine, nothing beats the Mustang 300 DS. Precision balanced for easy operation and maneuverability, this machine saves time and money by effectively doing the job of two scrubbers — a standard 180 RPM floor machine and a 300 RPM buffer.

Its high speed operation is perfect for polishing, buffing or damp scrubbing floors. At this speed it can also be used with a bonnet for routine carpet maintenance. Its low speed operation is used for efficient scrubbing, wet stripping and polishing in congested areas where greater control is needed.

Available in 17 and 20-inch widths, the Mustang 300 DS is ideal for schools, office buildings and other facilities where appearances need to be kept up while holding equipment costs down.

A mechanical lock-out mechanism on the handle must be released before the Mustang 300 DS will activate. This special safety feature prevents unauthorized operation if the machine is left unattended.




**NSS Enterprises, Inc.**  
3115 Frenchmens Road  
Toledo, Ohio 43607-2958  
USA



# MUSTANG 300 DS Specifications

BUFFING PATH	17 in. (43.2 cm) 20 in. (50.8 cm)	GEAR	3 idler planetary	MACHINE WEIGHT (w/ pad driver)	
MOTOR Type	Permanent magnet DC rectified 1.5 HP (1100 watts) 110-120V. 220-240V. available	PAD SPEEDS	300 RPM 180 RPM	17 in. (43 cm)	86 lbs. (39 kg)
HP Size Voltage		High		20 in. (51 cm)	93 lbs. (42 kg)
CURRENT	15 amps @ 120V. 7.5 amps @ 240V.	CORD	50 ft. (15.2 m) 14-3 ST safety yellow 75 ft. (23 m) 16-3 ST SHUKO safety yellow	SHIPPING WEIGHT (w/ pad driver)	
		120V. 240V.		17 in. (43 cm)	105 lbs. (48 kg)
				20 in. (51 cm)	112 lbs. (51 kg)
				WARRANTY	3 year limited

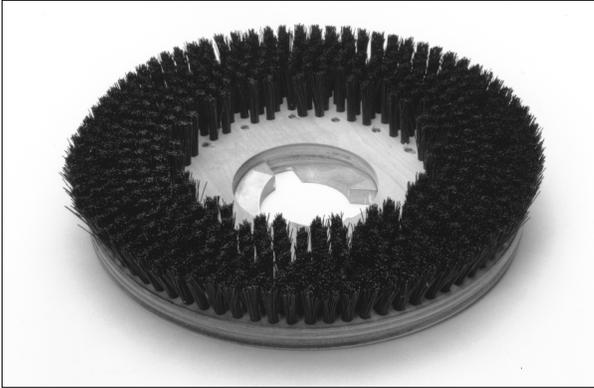

The Plastic Back Nylon Scrub Brush (20 inch — #2892201, 17 inch — #2897201) is used on the Mustang 300 DS to rotary scrub carpets.



The Mustang 300 DS features a mechanical lock-out on the handle which must be released before the switch lever can be activated. This important safety feature prevents unauthorized operation if the machine is left unattended.



The protected toggle switch on the rear of the machine body lets you easily go from high (300 RPM) to low (180 RPM), matching pad speed to the job at hand.



The Mustang 300 DS can be used with a bonnet (like the one pictured above) for routine carpet maintenance.



**NSS® Enterprises, Inc.**  
3115 Frenchmens Road  
Toledo, Ohio 43607-2958 USA  
419/531-2121 Fax 419/531-3761  
[www.nss.com](http://www.nss.com)  
[mailus@nss.com](mailto:mailus@nss.com)  
Specifications and appearance  
subject to change without notice.

DISTRIBUTED BY